


HAND OPERATED CHAIN LEVER BLOCK



DESCRIPTION & FEATURES

- Standard: ASME B30.21, BS EN 13157
- Proof Load: 1.5 x WLL
- Factor of Safety (FoS) – 4:1
- Durability in service.
- Lightweight and easy handling
- High efficiency and small hand pull
- Swivel 360° hooks with safety latches.
- Self-Lubricating anti-corrosion chain.
- Safe, Reliable in operations with minimum
- Quenched and tempered hooks are safe even when accidentally overloaded.
- Shock-resistant gear cover and brake cover locking out dust and rain.
- Extraordinary braking force, easy release, and the finest antirust treatment.
- JB Lifting Logo, CE, Serial / Identification ID number, WLL / SWL is shown on the tag.

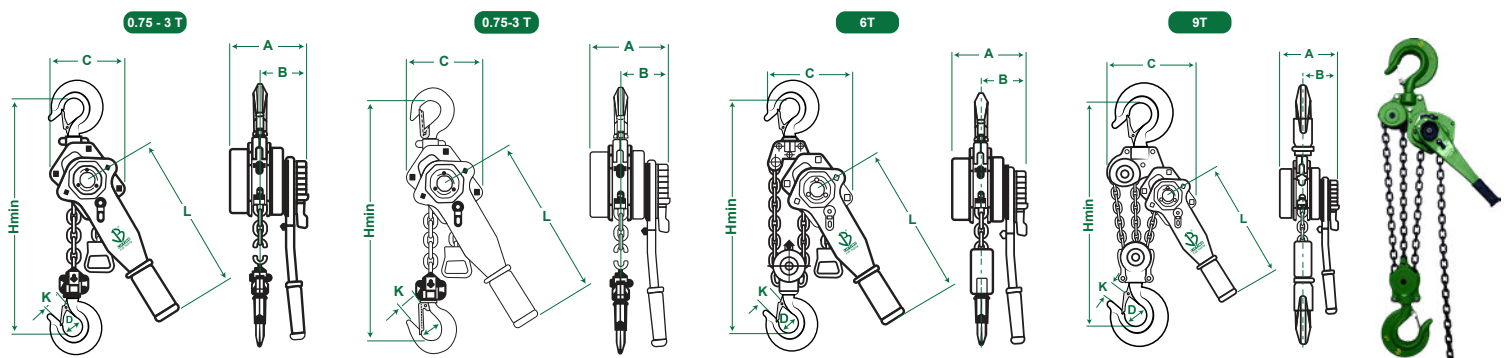

HAND OPERATED CHAIN LEVER BLOCK

LVRHST

Item Code (s)			LVRHST -0.25T	LVRHST -0.5T	LVRHST -0.75T	LVRHST -1T	LVRHST -1.5T	LVRHST -2T	LVRHST -3T	LVRHST -6T	LVRHST -9T
Work Load Limit		t	0.25	0.5	0.75	1	1.5	2	3	6	9
Standard lift		m	1	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5
Running test load		t	3.75	7.5	11.2	15	22.5	30	45	75	112.5
Effort required to lift rated load		N	250	340	140	185	230	251	285	385	390
Number of falls			1	1	1	1	1	1	1	2	3
Diameter of load chain		mm	4	5	6	6	7.1	8	10	10	10
Dimensions	A	mm	92	105	153	153	166	175	195	195	195
	B	mm	72	78	86	96	100	105	112	112	112
	C	mm	85	80	130	130	150	160	202	242	312
	D	mm	30	35	38	38	48	48	50	65	81
	H	mm	230	260	295	295	335	385	450	550	660
	L	mm	160	300	315	315	365	368	365	365	365
	K	mm	25	25	27	27	36	36	38	48	54
Net weight		kg	1.8	4	7.5	7.5	9.5	15.5	16.5	27	40
Packing measurement		cm	22x18 x11	37x12 x11	33x18 x18.5	33x16 x13	45.5x20 x20.5	45.5x20 x20.5	48x22 x23	50.5x23 x23	48.5x32.5 x25
Extra weight per meter of lift		kg	0.41	0.52	0.8	0.8	1.1	1.4	1.8	3.6	5.4



The data of products dimension in the catalogue is just for reference!
Copyright©2026 | www.jblifting.com | All rights reserved