


LIFTING BEAM CLAMP

DESCRIPTION & FEATURES

- **Standard** EN 13157
- **Safety factor** 2:1
- **Proof load** 1.5 x WLL
- **Application:** Designed for use with beams, girders, and structural components made of steel, concrete, timber, and other materials.
- **Materials:** Carbon steel, malleable iron, and forged steel.
- Lightweight and compact design.
- Exceptional wear-and-tear resistance.
- Special material covering on jaw-blocks.
- Compatible with beams, girders, and structural components made of various materials.

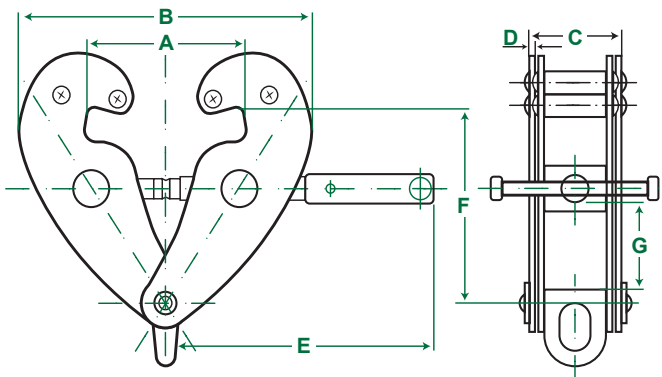

LIFTING BEAM CLAMP

IBC

ItemCode(s)	WLL	Adjustable beam width	Max A	Min B	Max B	C	D	E	Max F	Min F	Min G	Weight
	Tonne	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	Kg
IBC-01T	1000	75 - 220	295	185	400	80	4	225	165	90	25	3.8
IBC-02T	2000	75 - 220	295	185	400	85	6	225	165	90	25	5
IBC-03T	3000	80 - 320	365	240	520	117	8	258	225	135	45	9
IBC-05T	5000	80 - 320	365	240	520	125	10	258	225	135	45	11
IBC-10T	10000	90 - 320	365	255	520	158	12	280	230	160	50	16
IBC-20T	20000	90 - 320	360	295	550	155	16	300	255	200		30



WARNING

Never exceed Working Load Limit

The data of products dimension in the catalogue is just for reference!
Copyright©2023 | www.jblifting.com | All rights reserved