


S6 BOLT TYPE BOW SHACKLE

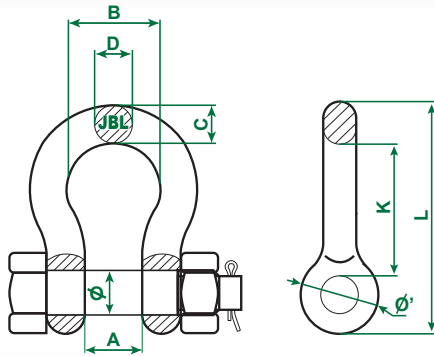

FEATURES

- **Standard:** ASME B30.26
- Applicable for frequent, quick use in overhead lifting
- Grade 6 high tensile shackles with forged carbon steel body and pin
- Meets the performance requirements of Federal Specification RR-C-271H, Type IVA, Grade A, Class 3, except for those provisions required of the contractor.
- Proof load tested to 2 times the W.L.L
- Minimum breaking load is 6 times the W.L.L
- 100% magnaflux crack detection during manufacturing.
- Material: Body- Forged carbon steel, Pin- Alloy steel
- Shackle Surface Treatment: Hot dip galvanized,
- Nut Surface Treatment: Cold Galvanizing
- Bolt Surface Treatment: Hot Galvanizing / Cold Galvanizing / Plastic Spraying
- Construction: Quenched & tempered
- It can not be used beyond Working Load Limit (WLL)
- Temperature use range: - 20 °C and 200 °C
- Size, Grade, Batch No., Working Load Limit, Trademark: JBL / JB LIFTING and CE are permanently shown on each shackle.

SHKB - BOLT TYPE BOW SHACKLE

SHKB

Item Code	Size	WLL	B.L	A	B	C	D	L	Ø	K	Ø'	Weight
	Inch	Tonne	Tonne	mm	mm	mm	mm	mm	mm	mm	mm	kg
SHKB-0.3T	3/16"	0.33	1.98	9.7 ± 1	15.3 ± 1.5	4.8 ± 0.5	4.8 ± 0.5	37.5 ± 2	6 ± 0.2	21.6 ± 2	14.2 ± 1	0.025
SHKB-0.5T	1/4"	0.5	3	12 ± 1	19.8 ± 1.5	6.4 ± 0.5	6.4 ± 0.5	46.8 ± 2	7.5 ± 0.2	28 ± 2	15.5 ± 1	0.042
SHKB-0.75T	5/16"	0.75	4.5	13.5 ± 1	21.4 ± 1.5	8 ± 0.8	9.7 ± 0.8	53 ± 2	9.5 ± 0.2	29.8 ± 2	19 ± 1	0.008
SHKB-01T	3/8"	1	6	16.8 ± 1.2	26.2 ± 2	9.7 ± 0.8	9.7 ± 0.8	63 ± 2	11.2 ± 0.2	35.5 ± 2	23 ± 1.5	0.146
SHKB-1.5T	7/16"	1.5	9	19 ± 1.2	29.5 ± 2	11.2 ± 0.8	11.2 ± 0.8	74 ± 2	13.4 ± 0.3	42 ± 2	27 ± 1.5	0.225
SHKB-02T	1/2"	2	12	20.6 ± 1.2	33.3 ± 2	13.6 ± 0.8	13.5 ± 0.8	84.2 ± 2	15.2 ± 0.3	47 ± 2	30 ± 1.5	0.338
SHKB-3.25T	5/8"	3.25	19.5	27 ± 1.2	43 ± 2.5	17.6 ± 1	16 ± 1	106.5 ± 3	19 ± 0.3	59 ± 3	38 ± 2	0.71
SHKB-4.75T	3/4"	4.75	28.5	32 ± 1.5	50.8 ± 2.5	20.6 ± 1	19.5 ± 1	126.5 ± 3	21.2 ± 0.3	71 ± 3	46 ± 2	1.187
SHKB-6.5T	7/8"	6.5	39	36.6 ± 1.5	58 ± 2.5	24.6 ± 1	22.4 ± 1	148 ± 3	25 ± 0.3	83 ± 3	53 ± 2	1.829
SHKB-8.5T	1"	8.5	51	43 ± 1.5	68.4 ± 2.5	27 ± 1	25.4 ± 1	166.6 ± 3	28 ± 0.3	94 ± 3	60.5 ± 2	2.693
SHKB-9.5T	1-1/8"	9.5	57	46 ± 1.5	74 ± 3	31.8 ± 1.5	29.5 ± 1.5	190 ± 4	30 ± 0.5	108 ± 4	68.3 ± 3	3.915
SHKB-12T	1-1/4"	12	72	51.6 ± 2	82.5 ± 3	35 ± 1.5	32.7 ± 2	209.6 ± 4	36 ± 0.5	117 ± 4	76.2 ± 3	5.661
SHKB-13.5T	1-3/8"	13.5	81	57 ± 2	92 ± 3	36 ± 1.5	36 ± 2	232.7 ± 4	39 ± 0.5	134 ± 4	84 ± 3	6.84
SHKB-17T	1-1/2"	17	102	60.5 ± 2	99 ± 3	41 ± 1.5	39 ± 2	254 ± 4	39 ± 0.5	146 ± 4	92.2 ± 3	8.78
SHKB-25T	1-3/4"	25	150	73.2 ± 3	127 ± 4	57 ± 2	46.7 ± 2	313.5 ± 4	48 ± 0.5	177 ± 4	106.4 ± 3	17.818
SHKB-35T	2"	35	210	82.5 ± 3	146 ± 4	61 ± 2	52.8 ± 2.5	347.5 ± 5	56 ± 0.5	196 ± 5	127 ± 4	24.958
SHKB-55T	2-1/2"	55	330	105 ± 3	184 ± 4	79.5 ± 2	68.8 ± 2.5	453 ± 5	68 ± 0.5	266 ± 5	147.7 ± 4	50.423
SHKB-85T	3"	85	510	127 ± 3	200 ± 4	92 ± 2	92 ± 3	546 ± 6	82.5 ± 0.6	330 ± 6	165 ± 5	70.00
SHKB-120T	3-1/2"	120	720	133 ± 3	229 ± 4	105 ± 2	105 ± 3	626 ± 6	95.5 ± 0.6	372 ± 6	203 ± 5	120.00
SHKB-150T	4"	150	900	146 ± 3	253 ± 4	102 ± 2	102 ± 3	640 ± 6	108 ± 0.6	369 ± 6	230 ± 5	153.00



WARNING

Never exceed Working Load Limit

The data of products dimension in the catalogue is just for reference!
Copyright©2026 | www.jblifting.com | All rights reserved