



S6 SCREW PIN BOW SHACKLE

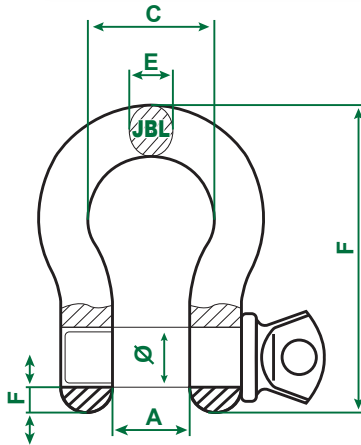

FEATURES

- **Standard:** ASME B30.26
- Applicable for frequent, quick use in overhead lifting
- Grade 6 high tensile shackles with forged carbon steel body and pin
- Meets the performance requirements of Federal Specification RR-C-271H, Type IVA, Grade A, Class 3, except for those provisions required of the contractor.
- Proof load tested to 2 times the W.L.L
- Minimum breaking load is 6 times the W.L.L
- 100% magnaflux crack detection during manufacturing.
- Material: Body- Forged carbon steel, Pin- Alloy steel
- Shackle Surface Treatment: Hot dip galvanized,
- Nut Surface Treatment: Cold Galvanizing
- Bolt Surface Treatment: Hot Galvanizing / Cold Galvanizing / Plastic Spraying
- Construction: Quenched & tempered
- It can not be used beyond Working Load Limit (WLL)
- Temperature use range: - 20 °C and 200 °C
- Size, Grade, Batch No., Working Load Limit, Trademark: JBL / JB LIFTING and CE are permanently shown on each shackle.

SHK - HIGH STRENGTH SCREW PIN BOW SHACKLE

SHK

Item Code	Size	WLL	B.L	A	C ± 1.2	D ± 0.5	E ± 0.5	F ± 0.5	Ø ± 0.2	L ± 2	K ± 2	Ø' ± 1	Weight
	Inch	Tonne	Tonne	mm	mm	mm	mm	mm	mm	mm	mm	mm	kg
SHK-0.33T	3/16"	0.33	1.98	9.7 ± 1	15.3	4.8	4.8	3.4	7.2	37.5	21.6	14.2	0.022
SHK-0.5T	1/4"	0.5	3	12 ± 1	19.8	6.4	6.4	3.4	8.7	46.8	28	15.5	0.04
SHK-0.75T	5/16"	0.75	4.5	13.5 ± 1	21.4	8	8	4	11	53	29.8	19	0.08
SHK-01T	3/8"	1	6	16.8 ± 1.2	26.2	9.7	9.7	5	13.5	63.2	35.5	23	0.13
SHK-1.5T	7/16"	1.5	9	19 ± 1.2	29.5	11.2	11.2	6	15	78	42	27	0.21
SHK-02T	1/2"	2	12	20.6 ± 1.2	33.3	13.5	13.5	6.6	17.5	83.3	47	30	0.32
SHK-3.25T	5/8"	3.25	19.5	27 ± 1.2	42.9	17.5	16	8.3	21.5	106.5	59	38	0.67
SHK-4.75T	3/4"	4.75	28.5	32 ± 1.5	50.8	20.6	19	10.75	23.5	126.5	71	46	1.04
SHK-6.5T	7/8"	6.5	39	36.6 ± 1.5	58	24.6	22.4	13.3	27.5	148	83	53	1.64
SHK-8.5T	1"	8.5	51	43 ± 1.5	68.4	27	25.4	15.75	30.5	167	94	60.5	2.51
SHK-9.5T	1-1/8"	9.5	57	46 ± 1.5	74	31.8	29.5	18.2	32.5	190	108	68.3	3.77
SHK-12T	1-1/4"	12	72	51.6 ± 2	82.6	35	32.7	19	38.7	209.6	117	76.2	4.98
SHK-13.5T	1-3/8"	13.5	81	57 ± 2	92.2	36	36	21	41.7	232.7	134	84	6.01
SHK-17T	1-1/2"	17	102	60.5 ± 2	98.6	41	39	25.3	42	254	146	92.2	8.3
SHK-25T	1-3/4"	25	150	73.2 ± 3	127	57	46.7	27.8	51	313.5	177	106.4	17
SHK-35T	2"	35	210	82.5 ± 3	146	61	52.8	31.5	59.5	347.5	196	127	21.7
SHK-55T	2-1/2"	55	330	105 ± 3	184	79.5	68.8	37.1	70.5	453	266	147.7	45.6



WARNING

Never exceed Working Load Limit

The data of products dimension in the catalogue is just for reference!
Copyright©2026 | www.jblifting.com | All rights reserved