


DESCRIPTION & FEATURES

- **According to standard:** EN1677
- **Material:** G80 alloy steel(quenched and tempered).
- **Safety factory:** 4:1
- **Proof load:** 2 x WLL
- **Finish:** Colour painted.
- Fatigue rated 1.5 times of WLL at 20,000 cycles.
- Used for shortening or holding required length of chain.
- Versatile assembly for multipurpose applications.
- Traceability code, CE, WLL and JBL embossed.

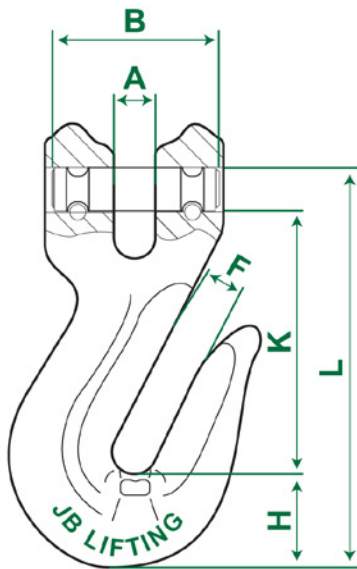

CLEVIS GRAB HOOK

CGK

Item Codes (s)	Working Load Limit	Breaking Load	Dimension						Weight
			A±0.5	F±0.5	B±1.5	H±1	K±2	L±2	
	tonnes	tonnes	mm	mm	mm	mm	mm	mm	
CGK06-1T	1.2	4.8	8	8	34	19.5	57	90.5	0.22
CGK08-1.5T	2	8	9.5	9.5	41	23	65.3	106.5	0.31
CGK10-3T	3.2	12.8	12.7	12.5	46	31	82	137	0.7
CGK13-5T	5.4	21.6	16	16.7	61	43	113	184.5	1.8
CGK16-8T	8.2	32.8	19.5	20	68.5	49	129.5	215	3.1
CGK20-12T	12.8	51.2	24	24	88	58	152	254	4.1
CGK22-15T	15.5	62	27	26	96	64.8	178	295	6.2



WARNING

Never exceed Working Load Limit

The data of products dimension in the catalogue is just for reference!
Copyright©2026 | www.jblifting.com | All rights reserved