


CLEVIS SLING HOOK



DESCRIPTION & FEATURES

- **Standard:** EN1677
- **Material:** G80 alloy steel(quenched and tempered).
- **Safety factory:** 4:1
- **Proof load:** 2 x WLL.
- **Finish:** Colour painted.
- **Fatigue rated:** 1.5 times of WLL at 20,000 cycles.
- Designed for coupling with Grade 80 alloy chain or wire rope for over head lifting operations.
- Versatile assembly for multipurpose applications.
- CE, Serial number, SWL & JB Lifting (JBL) Mark shown on label and carton.

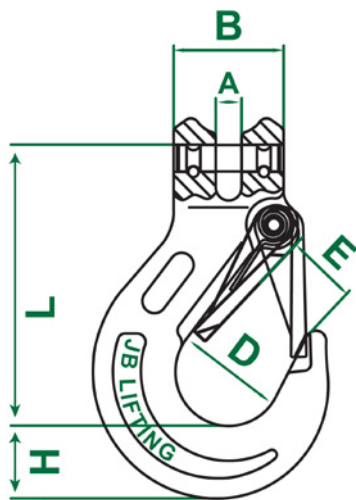

CLEVIS SLING HOOK

CSK

Item Code	Woring Load Limit	Breaking Load	A±0.5	B±1.5	D±1.5	H±1	L±2	E±2	Weight
	tonnes	tonnes	mm	mm	mm	mm	mm	mm	kg
CSK06-1T	1.12	4.48	8	32	35	23	76	26	0.32
CSK08-2T	2	8	9.5	37	37	32.5	85.5	29	0.48
CSK10-3T	3.15	12.6	13	49	46	35	104	39	0.95
CSK13-5T	5.3	21.2	16.5	56.5	56	42.5	128	47	1.8
CSK16-8T	8	32	21.5	70.5	60	54	150	55	3.4
CSK20-12T	12.5	50	24	77	79	58	180	61	6
CSK22-15T	15	60	27	91	101	62	213	72	10.4
CSK26-22T	21.2	84.8	30	117	115	75	250	85	14.5
CSK32-31T	31.5	126	35	150	140	88	317	106	27



WARNING

Never exceed Working Load Limit

The data of products dimension in the catalogue is just for reference!
Copyright©2026 | www.jblifting.com | All rights reserved

