
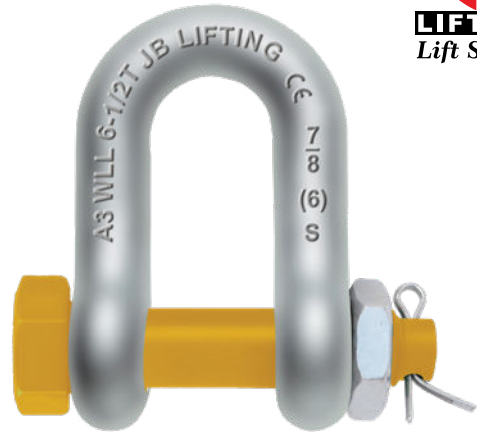


S6 BOLT TYPE DEE SHACKLE

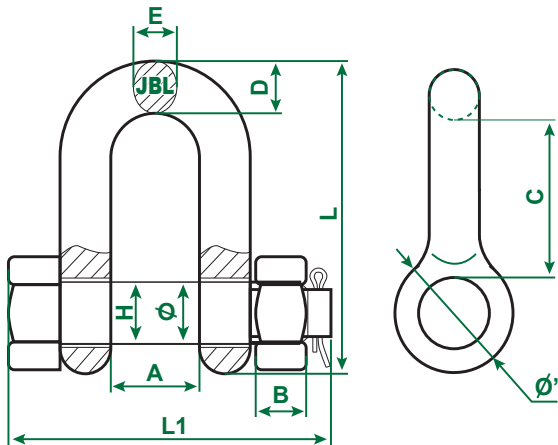

FEATURES

- **Standard:** ASME B30.26
- Applicable for frequent, quick use in overhead lifting
- Grade 6 high tensile shackles with forged carbon steel body and pin
- Meets the performance requirements of Federal Specification RR-C-271H, Type IVA, Grade A, Class 3, except for those provisions required of the contractor.
- Proof load tested to 2 times the W.L.L
- Minimum breaking load is 6 times the W.L.L
- 100% magnaflux crack detection during manufacturing.
- Material: Body- Forged carbon steel, Pin- Alloy steel
- Shackle Surface Treatment: Hot dip galvanized,
- Nut Surface Treatment: Cold Galvanizing
- Bolt Surface Treatment: Hot Galvanizing / Cold Galvanizing / Plastic Spraying
- Construction: Quenched & tempered
- It can not be used beyond Working Load Limit (WLL)
- Temperature use range: - 20 °C and 200 °C
- Size, Grade, Batch No., Working Load Limit, Trademark: JBL / JB LIFTING and CE are permanently shown on each shackle.

SHKDB - HIGH STRENGTH BOLT TYPE DEE SHACKLE

SHKDB

Item Code	Size	WLL	B.L	A	D ± 0.5	E ± 0.5	H ± 0.2	L ± 2	L1 ± 0.5	Ø	Ø' ± 1	B	C ± 2	Weight
	Inch	Tonne	Tonne	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kg
SHKDB-0.33T	3/16"	0.33	1.98	9.7 ± 1	4.8	4.8	7	34.15	32	6	14.2	3.2	18.7	0.023
SHKDB-0.5T	1/4"	0.5	3	12 ± 1	6.4	6.4	8.7	40.4	40	7.5	15.5	4	22	0.04
SHKDB-0.75T	5/16"	0.75	4.5	13.5 ± 1	8	8	11.5	48.5	48.4	9.5	19	5	25.6	0.09
SHKDB-01T	3/8"	1	6	16.8 ± 1.2	9.7	9.7	13	58.7	57.8	11.2	23	6	30	0.15
SHKDB-1.5T	7/16"	1.5	9	19 ± 1.2	11.2	11.2	12.7	67.8	65.9	13.4	27	7	35.4	0.21
SHKDB-02T	1/2"	2	12	20.6 ± 1.2	12.7	12.7	17	77	73.7	15.2	30	8	40.2	0.32
SHKDB-3.25T	5/8"	3.25	19.5	27 ± 1.2	17.5	16	21	95.5	94	19	38	10	50	0.61
SHKDB-4.75T	3/4"	4.75	28.5	32 ± 1.5	20.6	19.5	23	115	108.7	21.2	46	10	60.5	1.1
SHKDB-6.5T	7/8"	6.5	39	36.6 ± 1.5	24.6	22.4	25.9	135.4	127.8	25	53	12	71	1.67
SHKDB-8.5T	1"	8.5	51	43 ± 1.5	27	26	29.2	151	145.8	28	60.5	13.5	79	2.38
SHKDB-9.5T	1-1/8"	9.5	57	46 ± 1.5	31.8	28.7	32	172.2	160.7	30	68.3	15	90	3.62
SHKDB-12T	1-1/4"	12	72	51.6 ± 2	35	32.7	38.5	190.5	181	36	76.2	18	97	5.1
SHKDB-13.5T	1-3/8"	13.5	81	57 ± 2	35	36	41	210.3	188.3	39	84	19	107	6.4
SHKDB-17T	1-1/2"	17	102	60.5 ± 2	41.2	38.1	41.5	230	211	39	92.2	20	121	8.1
SHKDB-25T	1-3/4"	25	150	73.2 ± 3	53.8	44.5	50.5	278.7	281.6	48	106.4	39	146	15.4
SHKDB-35T	2"	35	210	82.5 ± 3	61	53	58.4	323.6	311	56	127	46	169	22.9
SHKDB-55T	2-1/2"	55	330	105	65	65	70	376	330	70	145	32	203	35.33
SHKDB-85T	3"	85	510	127	75	75	83	427	380	83	162	39	229	52.97



WARNING

Never exceed Working Load Limit

The data of products dimension in the catalogue is just for reference!
Copyright©2026 | www.jblifting.com | All rights reserved