
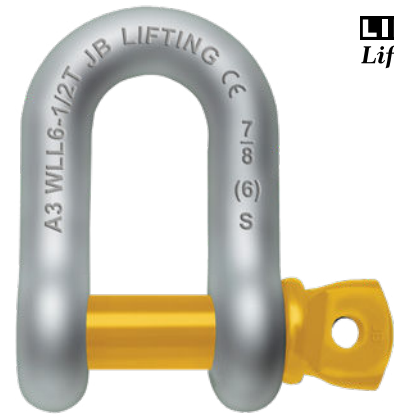


S6 SCREW PIN DEE SHACKLE

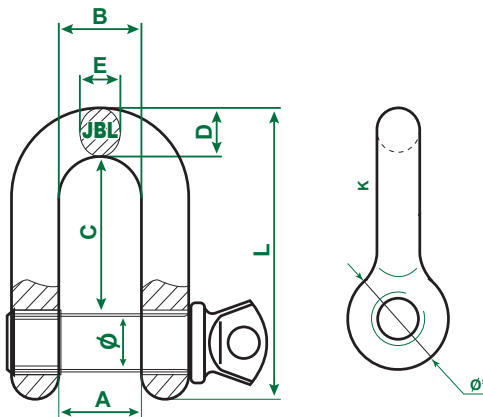

FEATURES

- **Standard:** ASME B30.26
- Applicable for frequent, quick use in overhead lifting
- Grade 6 high tensile shackles with forged carbon steel body and pin
- Meets the performance requirements of Federal Specification RR-C-271H, Type IVA, Grade A, Class 3, except for those provisions required of the contractor.
- Proof load tested to 2 times the W.L.L
- Minimum breaking load is 6 times the W.L.L
- 100% magnaflux crack detection during manufacturing.
- Material: Body- Forged carbon steel, Pin- Alloy steel
- Shackle Surface Treatment: Hot dip galvanized,
- Nut Surface Treatment: Cold Galvanizing
- Bolt Surface Treatment: Hot Galvanizing / Cold Galvanizing / Plastic Spraying
- Construction: Quenched & tempered
- It can not be used beyond Working Load Limit (WLL)
- Temperature use range: - 20 °C and 200 °C
- Size, Grade, Batch No., Working Load Limit, Trademark: JBL / JB LIFTING and CE are permanently shown on each shackle.

SHKD - HIGH STRENGTH SCREW PIN DEE SHACKLE

SHKD

Item Code	Size	WLL	B.L	A	C ± 2	E ± 0.5	D ± 0.5	L ± 2	Ø ± 0.2	Ø' ± 1	Weight
	Inch	Tonne	Tonne	mm	mm	mm	mm	mm	mm	mm	kg
SHKD-0.33T	3/16"	0.33	1.98	9.7 ± 1	18.7	4.8	4.8	34.2	6	14.2	0.02
SHKD-0.5T	1/4"	0.5	3	12 ± 1	22	6.35	6.35	40.4	7.5	15.5	0.04
SHKD-0.75T	5/16"	0.75	4.5	13.5 ± 1	25.6	8	8	48.5	9.5	19	0.07
SHKD-01T	3/8"	1	6	16.8 ± 1.2	30	9.7	9.7	58.5	11.5	23	0.12
SHKD-1.5T	7/16"	1.5	9	19 ± 1.2	35.4	11.2	11.2	67.6	13.4	27	0.19
SHKD-02T	1/2"	2	12	20.6 ± 1.2	40.2	12.7	12.7	77	15.5	30	0.27
SHKD-3.25T	5/8"	3.25	19.5	27 ± 1.2	50	16	17.5	95.5	19.5	38	0.58
SHKD-4.75T	3/4"	4.75	28.5	32 ± 1.5	60.5	19	20.6	116.6	21.5	46	0.98
SHKD-6.5T	7/8"	6.5	39	36.6 ± 1.5	71	22.4	24.6	135.5	25	53	1.53
SHKD-8.5T	1"	8.5	51	43 ± 1.5	79	26	27	150.8	28	60.5	2.14
SHKD-9.5T	1-1/8"	9.5	57	46 ± 1.5	90	28.7	31.8	172.2	29.5	68.3	3.17
SHKD-12T	1-1/4"	12	72	51.6 ± 2	97	32.7	35	190.5	35.7	76.2	4.45
SHKD-13.5T	1-3/8"	13.5	81	57 ± 2	107	36	35	210.3	39	84	5.57
SHKD-17T	1-1/2"	17	102	60.5 ± 2	121	38	41	230.1	39	92.2	7.22
SHKD-25T	1-3/4"	25	150	73.2 ± 3	146	44.5	53.8	278.6	48	106.4	13
SHKD-35T	2"	35	210	82.5 ± 3	169	53	61	324	56	127	20.2



WARNING

Never exceed Working Load Limit

The data of products dimension in the catalogue is just for reference!
Copyright © 2026 | www.jblifting.com | All rights reserved