


DOUBLE SHEAVE PULLEY

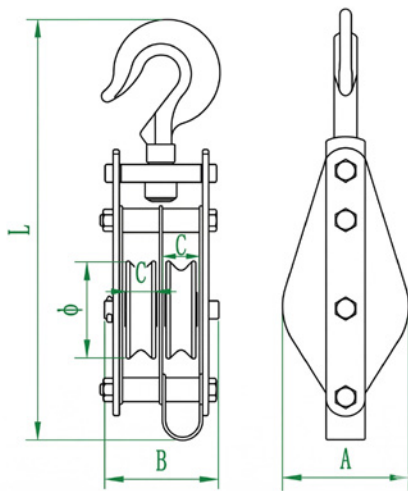

DESCRIPTION & FEATURES

- **Standard:** ASME B30.26
- Supports heavy loads with dual sheaves.
- Secure, flexible attachment for versatile use.
- Durable material, ideal for outdoor/industrial use.
- Low-friction sheaves for easy lifting.
- Suitable for construction, marine, and DIY tasks.

DOUBLE SHEAVE PULLEY

SIZE	SWL	WIRE DIA	DIMENSION(MM)					WEIGHT(KG)
			Φ	L	A	B	C	
2"	0.25T	6MM	49	217	58	73	11	1.2KG
3"	0.5T	8MM	70.5	270.5	81	89	13	2KG
4"	1T	10MM	97	304.5	112	102	16	3.65KG
5"	1.5T	13MM	125	379	140	113	17	6.2KG
6"	2T	16MM	146	415	168	144	22	9.3KG
7"	3T	19MM	173	505	186	168	25	16.7KG
8"	4T	22MM	200	512	212	168	26	21KG
10"	5T	25MM	250	611	276	180	28	43KG
12"	6T	28MM	300	661	326	180	28	56KG



WARNING

Never exceed Working Load Limit

The data of products dimension in the catalogue is just for reference!
Copyright©2026 | www.jblifting.com | All rights reserved