

ELECTRIC CHAIN BLOCK WITH TROLLEY



DESCRIPTION

- **Standard:** EN 14492:2 and ASME: B 30.16
- **Safety factor** 2:1
- **Temperature** -20°C to 65°C.
- **Proof load tested** 1.25 x WLL.
- **Versatility:** Versatile lifting solution for industrial needs.
- **Enhanced Mobility:** Equipped with a trolley for easy movement of heavy loads.
- **Advanced Safety Features:** Includes electronic limit load device and heat protection for secure lifting.

FEATURES

- Includes D.C. normal close brake and electronic limit load device.
- High tensile alloy steel hooks and carbonized load chain for longevity.
- Compatible with 3P/220~380V or 60Hz inputs.





ELECTRIC CHAIN BLOCK WITH TROLLEY

CHBET

Item Code (s)	WLL	Classification FEM/ISO	Duty Rating	Lifting Speed	Hoist Motor Power	Load Chain	Fall	Travelling Speed	Trolley Motor	Beam Flange
	Tonne		ED	M/Min	kW	mm		M/ Min	kW	mm
CHBET-S-01	1	3m/M5	40%	8.6	1.5	7.1	1	23	0.4	75-178
CHBET-V-01			26.6%/13.4%	1.4-8.6						
CHBET-S-02	2		40%	8.6	3.3	10	1	23	0.4	82-178
CHBET-V-02			26.6%/13.4%	1.4-8.6						
CHBET-S-03	3		40%	6.7	3.3	10	1	23	0.4	100-178
CHBET-V-03			26.6%/13.4%	1.1-6.7						
CHBET-S-05	5		40%	4.0	3.3	11.2	2	23	0.75	112-178
CHBET-V-05			26.6%/13.4%	0.66-4.0						

Item Code (s)	WLL	H Min	A	B	C	D	F	J	K	M	N
	Tonne		mm	mm	mm	mm	mm	mm	mm	mm	mm
CHBET-S-01	1	460	142	102	319	273	340	650	38	310	135
CHBET-V-01					349					336	
CHBET-S-02	2	650	185	59	319	273	340	650	45	312	135
CHBET-V-02					349					338	
CHBET-S-03	3	525	185	165	358	336	370	810	45	314	140
CHBET-V-03					471					340	
CHBET-S-05	5	860	240	110	358	336	410	850	61	360	142
CHBET-V-05					471					410	

Lifting Height	0<H≤ 12M	12<H≤ 18M	18<H≤ 24M	24<H≤ 30M	30<H≤ 50M	50<H≤ 100M
Capacity Reduction	0%	10%	20%	30%	40%	50%

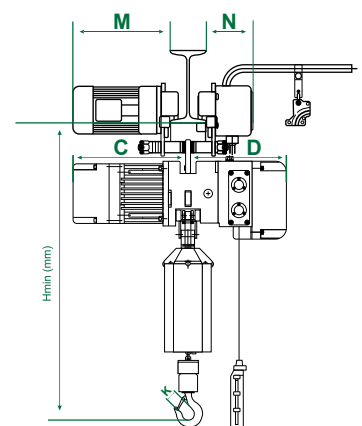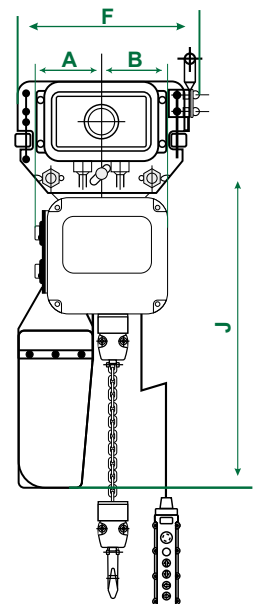

WARNING

Never exceed Working Load Limit

The data of products dimension in the catalogue is just for reference!
Copyright©2026 | www.jblifting.com | All rights reserved