


EYE SLING LATCH HOOK

DESCRIPTION & FEATURES

- **Standard** EN 1677-5
- **Safety Factor** 4:1
- **Proof load:** 2 x WLL
- 100% MPI tested.
- Made from durable G80 alloy steel.
- Prioritizes safety.
- Minimizing the risk of accidents or failures during lifting operations.
- Withstand repeated use without compromising performance.
- Ensuring long-lasting reliability.
- CE, Serial number, SWL & JB Lifting (JBL) Mark shown on label and carton.

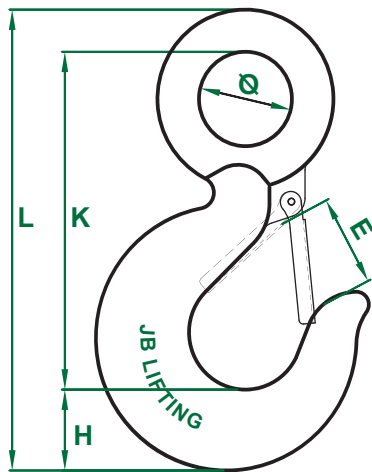

EYE SLING LATCH HOOK

ESK

ITEM CODE	WLL	Breaking Load	$\theta \pm 1$	$E \pm 1.5$	$H \pm 1$	$K \pm 2$	$L \pm 2$	Weight
	tonnes	tonnes	mm	mm	mm	mm	mm	kg
ESK01T	1.12	4.48	19	22	19	80	110	0.28
ESK02T	2	8	28	25	25	103	140.5	0.65
ESK03T	3.15	12.6	31	27.5	28	118	162	0.94
ESK05T	5.3	21.2	39	33	35	145	201	1.95
ESK08T	8	32	51	40	45	180	256	3.77
ESK12T	12.5	50	62	51	57	230	317	6.8
ESK15T	15	60	73	57	70	260	360	9.8
ESK21T	21.2	84.8	89	75	76	318	434	16.25
ESK31T	31.5	126	90	98	91	360	495.5	27.2



WARNING

Never exceed Working Load Limit

The data of products dimension in the catalogue is just for reference!
Copyright©2026 | www.jblifting.com | All rights reserved