


G80 CHAIN CONNECTOR

DESCRIPTION & FEATURES

- **Standard:** EN 1677
- **Material:** Forged alloy steel/ Grade 80,.
- **Factor of safety:** 4 to 1
- **Construction:** Quenched & tempered.
- **Proof load:** 2 times of working load limit.
- **Finish:** Powder coated.
- 100% MPI tested.
- Designed for use with grade 80 alloy steel chain.
- Used for connecting alloy steel chain to components.
- CE, Serial number, SWL & JB Lifting (JBL) Mark shown on the product.

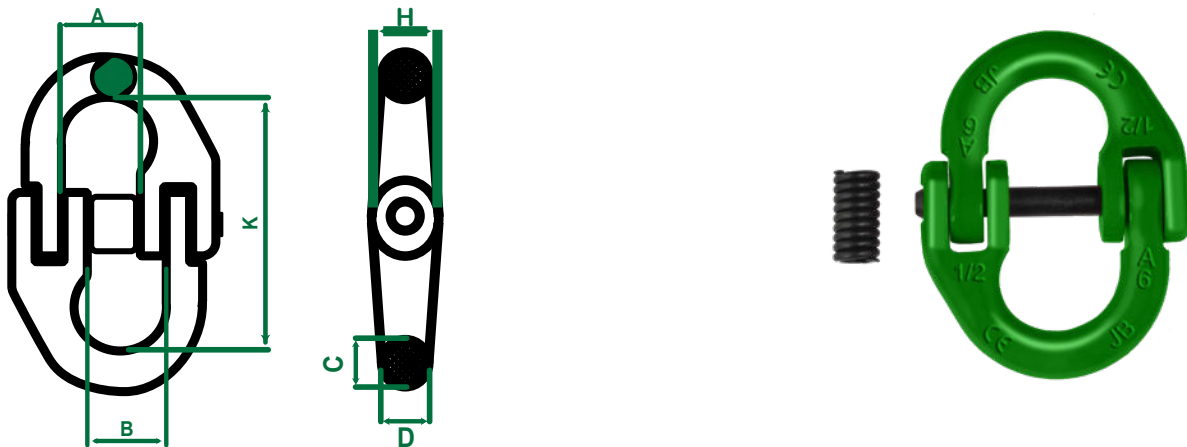

G80 CHAIN CONNECTOR

CEK

ITEM NO.	WEIGHT	WLL	Breaking Load	A	B	H	K	C	D
	kg	tonne	tonne	mm	mm	mm	mm	mm	mm
CEK01T-336	0.13	1.5	6	16.8±0.8	18±1.5	13 +0.5/-1	51±2.5	8±0.5	8±0.5
CEK01T-337	0.14	1.6	6.4	14±0.8	18±1.5	12 +0.5/-1	48.6±2.5	8±0.5	8±0.5
CEK02T-336	0.15	2	8	17.7±1.5	21.8±1.5	14.5 +0.5/-1	58.5±3	9.8±0.5	9.8±0.5
CEK03T-336	0.33	3.2	12.8	22±1.5	24±1.5	17±1	63.6±3	12±0.8	12±0.8
CEK05T-336	0.76	5.4	21.6	29±2	35±2	21.6±1	85±3	15±0.8	15±0.8
CEK08T-336	1.3	8.2	32.8	35.5±2	40.5±2	26±1	103±3	18±0.8	18±0.8
CEK12T-337	2.27	12.8	51.2	41±2	47±3	32±1	116±3	23±1	23±1
CEK15T-336	3.4	15.5	62	51±2	54.5±3	38 +1/-2	136.5±3	26±1	26±1
CEK21T-336	4.68	21.6	86.4	58±2	67.5±2	42±2	161±4	31±1	30±1
CEK31T-336	8.75	32.8	131.2	67.5±2	84.5±3	51±2	201±4	38±1	37±1



The data of products dimension in the catalogue is just for reference!
Copyright© 2026 | www.jblifting.com | All rights reserved