


GALVANIZED THIMBLE

DESCRIPTION & FEATURES

- Standard G411
- Strong galvanized steel construction.
- Protects and reinforces wire rope eyes.
- Ideal for rigging and wire rope applications.
- Ensures longevity and safety at connection points.
- Resistant to wear and tear.
- Versatile for various industries.
- Made from durable G80 alloy steel.

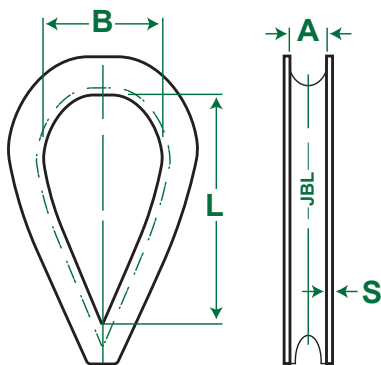

GALVANIZED THIMBLE

TMBG

ItemCode(s)	Rope Diameter	Dimensions				Weight
		L	A	B	S	
	mm	mm	mm	mm	mm	kgs/100
TMB02.5-G	2.5	22	16	19	12	0.5
TMB3.5-G	3.5	26	17	21	13	0.8
TMB04-G	4	25	19	16	11	0.4
TMB05-G	5	31	22	22	16	0.8
TMB06-G	6	37	29	26	19	1.4
TMB08-G	8	51	38	34	24	2.8
TMB10-G	10	64	44	42	32	4.8
TMB12-G	12	76	57	51	38	8
TMB14-G	14	82	60	57	40	10
TMB16-G	16	89	64	60	42	15
TMB18-G	18	102	69	67	45	22
TMB20-G	20	115	79	76	51	25
TMB22-G	22	127	89	83	54	32
TMB24-G	24	140	102	88	64	46
TMB26-G	26	152	105	102	68	66
TMB28-G	28	165	115	110	73	77
TMB30-G	30	178	121	115	79	80
TMB32-G	32	203	133	140	93	130
TMB36-G	36	229	184	177	115	540
TMB40-G	40	254	206	198	120	730



WARNING

Never exceed Working Load Limit

The data of products dimension in the catalogue is just for reference!
Copyright©2026 | www.jblifting.com | All rights reserved