


HEAVY DUTY MANUAL-HAND OPERATED CHAIN BLOCK HOIST



DESCRIPTION & FEATURES

- Standard: EN 13157 and ASME B30.16
- Proof load: 1.5 x WLL
- Factor of Safety (FoS) - 4:1.
- Durability in service.
- Powder coated finished.
- High efficiency and small hand pull.
- Lightweight and easy handling.
- Automatic double pawl brake.
- High tensile quality load/lift chain.
- Zinc plated / Hot-dip Galvanized chain.
- High-quality bearings for the gearbox, side plates and load chain sheave permit a long service life.
- Quenched and Tempered High tensile alloy steel chain and hooks
- JB Lifting Logo, CE, Serial / Identification ID number, WLL / SWL is shown on the tag

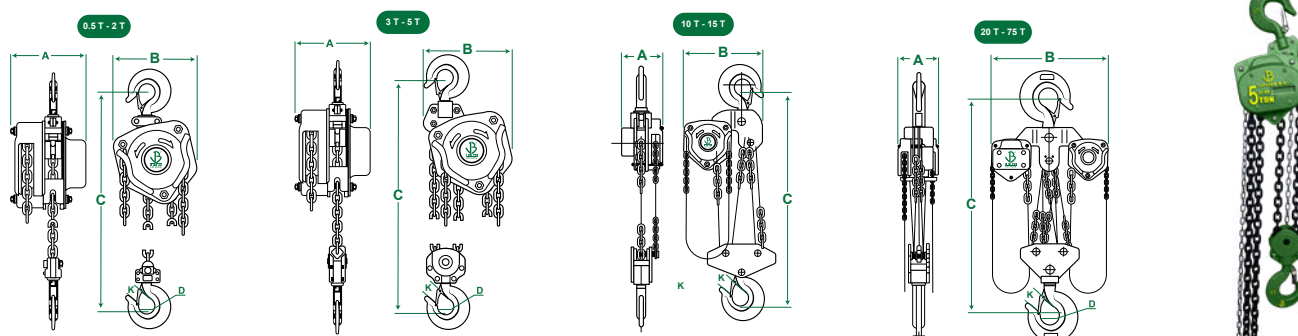

MANUAL CHAIN BLOCK

CHB

Item Code (s)		CHB0.5	CHB01	CHB1.5	CHB02	CHB03		CHB05	CHB7.5	CHB10		CHB15	CHB20		CHB30
Working Load Limit	tonne	0.5	1	1.5	2	3	3	5	7.5	10	10	15	20	20	30
Standard lift	m	3	3	3	3	3	3	3	3	3	3	3	3	3	3
Running test load	kN	7.5	15	22.5	30	45	45	75	112.5	150	150	225	300	300	450
Effort required to lift rated load	N	225	300	310	310	350	370	400	415	410	415	420	410x2	410x2	410x2
Diameter of load chain	mm	5	6	7.1	8	7.1	8	9	10	9	10	10	9	10	10
Number of Falls		1	1	1	1	2	2	2	3	4	4	6	8	8	12
Dimensions (mm)	A	132	152	152	185	152	155	185	189	185	189	194	220	224	274
	B	152	157	180	207	207	207	267	380	380	380	400	440	440	649
	C	315	355	375	430	500	500	680	650	750	750	880	940	940	1100
	D	34	38	48	48	50	50	57	72	80	80	85	106	106	120
	K	27	27	36	36	38	38	48	47	51	51	58	70	70	80
Net weight	kg	8.5	11	13.5	17.5	20.5	23	36.5	44	60	65	102	146	156	246
Packing measurement	cm	24.5x19 x18	26x19 x19	30.5x21 x19	30x23.5 x23	34x24 x19		49x29 x23	47x42 x23	47x42 x22		97x48 x23	80x70 x24	80x70 x23	80x70 x37
Extra weight per meter of lift	kg	1.3	1.6	2	2.3	3.2	3.7	4.5	7.5	8.1	9.7	14	16.2	19.3	28.2



WARNING

Never exceed Working Load Limit

The data of products dimension in the catalogue is just for reference!
Copyright©2026 | www.jblifting.com | All rights reserved