


HORIZONTAL PIPE LIFTING HOOK



DESCRIPTION & FEATURES

- **Standard** EN 13155, ASME b30.2
- **Material:** Q355 Low alloy high strength structural steel.
- **Safety factor** 2:1
- **Proof load** 1.5 x WLL.
- Teflon-coated surface for durability and smooth operation.
- Compact shape and low weight with high lifting capacity.
- Ideal for horizontal lifting and transportation of steel and concrete pipes.
- **Note:** Clamps to be always used in pairs.

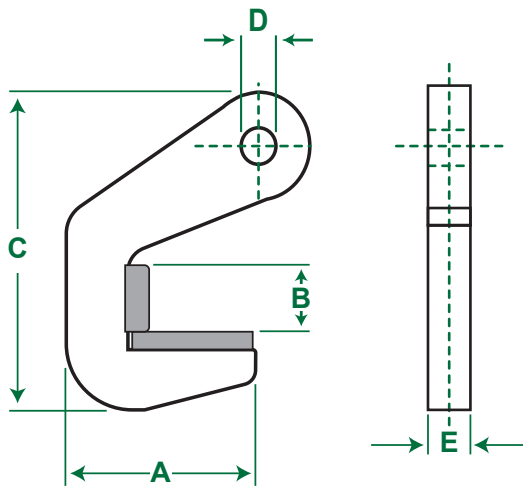

HORIZONTAL PIPE LIFTING HOOK

PHK

Item code(s)	WLL @45° STV tonne/pair	Jaw Opening mm	Dimension				Net weight Kg
			A mm	B mm	D mm	E mm	
PHK-1.5T	1.5	40	127	40	27	35	1.5
PHK-3T	3.0	40	142	40	27	35	3
PHK-4T	4.0	50	144	50	30	40	4
PHK-6T	6.0	50	152	50	30	40	5
PHK-8T	8.0	70	155	70	30	42	6.7
PHK-12T	12.0	70	175	70	33	46	10
PHK-16T	16.0	70	175	70	40	56	13
PHK-18T	18.0	70	145	70	52	68	15



WARNING

Never exceed Working Load Limit

The data of products dimension in the catalogue is just for reference!
Copyright©2026 | www.jblifting.com | All rights reserved