


HORIZONTAL PLATE LIFTING CLAMP



DESCRIPTION & FEATURES

- **Standard:** EN 13155.
- **Safety factor:** 2:1
- **Proof load:** 1.5 x WLL.
- **Minimum working load:** 10%.
- 0-90 degrees capacity reduction
- **Lateral:** 15 degrees max
- Prevents slippage during lifting and lowering.
- Secure locking mechanism in both open and closed positions.
- Ideal for steel fabrication, construction sites, shipbuilding, and warehouse operations.
- The versatile design ensures it performs seamlessly in various industrial settings.
- **Warning:** Always used in pairs

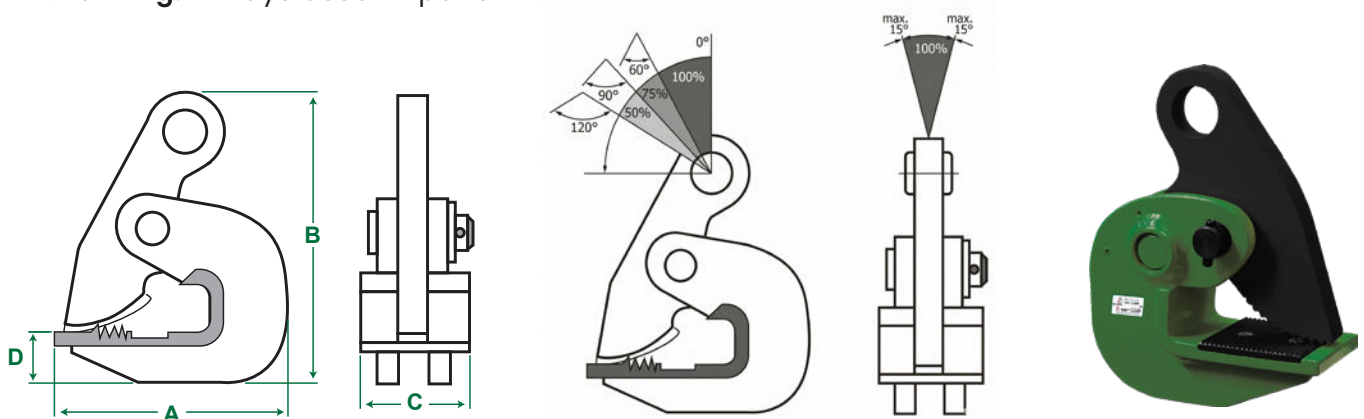

HORIZONTAL PLATE LIFTING CLAMP

LCB

Item Code(s)	Pair Capacity	Test Load	Jaw Opening	Dimensions				Net Weight
	(Tonne)	(kN)	(mm)	A (mm)	B (mm)	C (mm)	D (mm)	(kg)
LCB-0.5T	0.5	7.35	0-25	126	165	50	42	2.5
LCB-01T	1	14.7	0-30	148	205	65	48	3.5
LCB-02T	2	29.4	0-40	172	245	68	58	5
LCB-03T	3	44.1	0-45	180	245	70	58	6
LCB-04T	4	58.8	0-50	180	255	70	58	6.5
LCB-05T	5	73.5	0-55	180	260	74	58	7.5
LCB-06T	6	88.2	0-65	223	308	80	63	10.5
LCB-08T	8	117.6	0-100	282	400	90	96	22
LCB-10T	10	147	0-125	325	510	90	108	33



WARNING

Never exceed Working Load Limit

The data of products dimension in the catalogue is just for reference!
Copyright©2026 | www.jblifting.com | All rights reserved