


Snatch Block (With Swivel Hook Type)



DESCRIPTION & FEATURES

- Manufactured from high-quality tensile steel for exceptional strength and durability.
- Furnished with roller bearings for smooth and efficient operation
- Reduce friction and wear on ropes and cables.
- Reliable performance in critical lifting operations.
- Meets or exceeds all requirements of ASME B30.26 and standard EN 13157.
- Safety factor 4:1.
- Proof load 2 x WLL
- Temperature -10°C to 50°C.

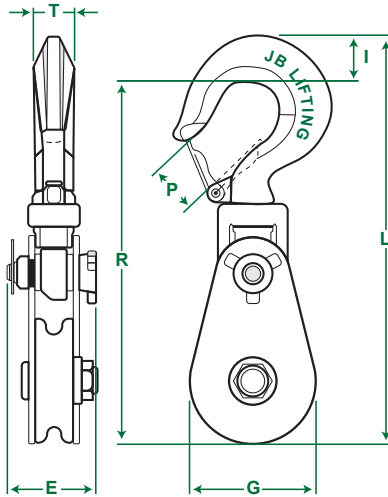

Snatch Block (With Swivel Hook Type)

SNBK

ItemCode(s)	Working Load	Sheave Dia.	Wire Rope Size		Dimensions							Weight
					T	E	G	I	R	L	P	
	(Tonne)	(Inch)	(mm)	(Inch)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(kg)
SNB02T-03K	2	3	8-10	5/16 ~ 3/8	18	64	75	25	224	250	25	23
SNB04T-04K	4	4.5	10-13	3/8 ~ 1/2	29	79	108	48	321	355	32	5.9
SNB08T-06K	8	6	16-19	5/8 ~ 3/4	38	104	104	54	427	488	51	12.8
SNB08T-08K	8	8	16-19	5/8 ~ 3/4	38	104	220	54	502	565	51	18.8
SNB12T-06K	12	6	19-22	3/4 ~ 7/8	41	134	168	67	498	565	64	22.7
SNB15T-08K	15	8	19-26	3/4 ~ 1	49	134	220	67	547	614	64	28.9
SNB15T-10K	15	10	19-26	3/4 ~ 1	49	134	280	67	702	769	64	42.7
SNB15T-12K	15	12	19-26	3/4 ~ 1	49	150	330	67	727	794	64	52.9
SNB20T-08K	20	8	25-29	1 ~ 1 1/8	61	150	216	76	643	719	86	41
SNB20T-10K	20	10	25-29	1 ~ 1 1/8	61	150	280	76	750	826	86	52.5
SNB20T-12K	20	12	25-29	1 ~ 1 1/8	61	150	330	76	805	881	86	62.5



WARNING

Never exceed Working Load Limit

The data of products dimension in the catalogue is just for reference!
Copyright©2026 | www.jblifting.com | All rights reserved