


Snatch Block (With Swivel Shackle Type)



DESCRIPTION & FEATURES

- Meets or exceeds all requirements of ASME B30.26 and standard EN 13.57.
- Safety factor 4:1.
- Proof load 2 x WLL
- Temperature -10°C to 50°C.
- Manufactured from high-quality tensile steel for exceptional strength and durability.
- Furnished with roller bearings for smooth and efficient operation.
- Reduce friction and wear on ropes and cables.
- Reliable performance in critical lifting operations.

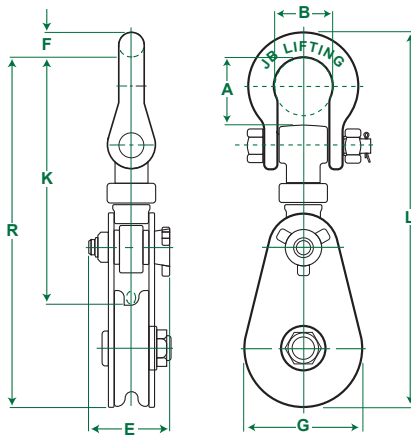

Snatch Block (With Swivel Shackle Type)

SNBS

ItemCode(s)	Working	Sheave	Wire Rope Size		Dimensions								Weight
	Load	Dia.			A	B	K	R	E	F	G	L	
	Tonne	Inch	mm	Inch	mm	mm	mm	mm	mm	mm	mm	mm	
SNB02T-03S	2	3	8-10	5/16 ~ 3/8	35	30	150	217	64	11	75	228	2
SNB04T-4.5S	4	4.5	10-13	3/8 ~ 1/2	64	50	243	337	79	19	107	356	5.9
SNB08T-06S	8	6	16-19	5/8 ~ 3/4	87	76	320	452	104	32	152	484	13
SNB08T-08S	8	8	16-19	5/8 ~ 3/4	87	76	333	526	104	32	220	558	19.5
SNB12T-06S	12	6	19-22	3/4 ~ 7/8	78	80	359	496	134	44	167	540	24.3
SNB15T-08S	15	8	19-26	7/8 ~ 1	78	80	355	545	134	44	220	589	29.6
SNB15T-10S	15	10	19-26	7/8 ~ 1	78	80	423	670	134	44	280	714	43
SNB15T-12S	15	12	19-26	7/8 ~ 1	78	80	428	726	134	44	330	770	53.5
SNB20T-08S	20	8	25-29	1 ~ 1 1/8	109	93	481	616	150	55	216	671	41.2
SNB20T-10S	20	10	25-29	1 ~ 1 1/8	109	93	485	723	150	55	280	778	54
SNB20T-12S	20	12	25-29	1 ~ 1 1/8	109	93	520	778	150	55	330	833	62.5
SNB25T-18S	25	18	26-32	1 ~ 1 1/4	140	130	645	1100	165	55	450	1012	150
SNB30T-20S	30	20	32-36	1 1/4 ~ 1 1/2	155	145	645	1130	185	55	515	1180	213



WARNING

Never exceed Working Load Limit

The data of products dimension in the catalogue is just for reference!
Copyright©2026 | www.jblifting.com | All rights reserved