
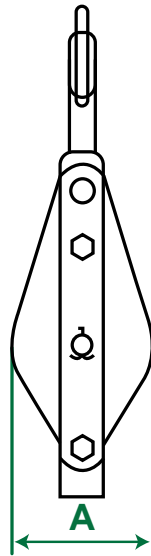


SINGLE SHEAVE PULLEY

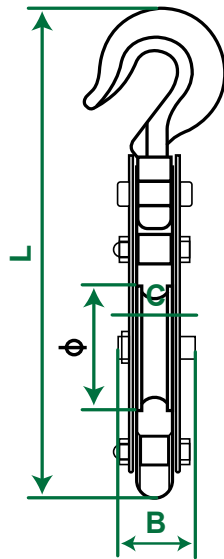

DESCRIPTION & FEATURES

- **Standard:** ASME B30.26
- Blocks are used to change the direction of one or more ropes.
- Also used to make it easier to lift and haul loads.
- Sheave diameter is 4-inch.
- Maximum rope size is 3/8" - 1/2"
- Capacity is 1200 pounds.

SINGLE SHEAVE PULLEY

SIZE	SWL	WIRE DIA	Φ	L	A	B	C	WEIGHT
2"	0.25T	6MM	49	217	58	52.5	11	0.55KG
3"	0.5T	8MM	70.5	270.5	81	68.5	13	1.15KG
4"	1T	10MM	97	304.5	112	79.5	16	1.85KG
5"	1.5T	13MM	125	379	140	87	17	3.2KG
6"	2T	16MM	146	415	168	114	22	4.8KG
7"	3T	19MM	173	505	186	128	25	7.8KG
8"	4T	22MM	200	512	212	128.5	26	10KG
10"	5T	25MM	250	611	276	136	28	15KG
12"	6T	28MM	300	661	326	185	28	21KG



WARNING

Never exceed Working Load Limit

The data of products dimension in the catalogue is just for reference!
Copyright©2026 | www.jblifting.com | All rights reserved