


SORTING PIPE HOOK



DESCRIPTION & FEATURES

- **Material** Alloy steel quenched and tempered
- **Safety Factor** 4:1
- **Long Tapered Body:** Designed to easily slide into and grip the pipe's bore for engagement.
- **Deep Throat:** Provides a wide cradling area to hold the pipe firmly, preventing slippage during lifting.
- **Forged Steel Construction:** Ensures maximum strength and durability for heavy-duty lifting applications.
- **Versatility:** Suitable for lifting pipes of various diameters within its rated capacity.
- **Safe Lifting:** Promotes safe handling of pipes by minimizing the risk of slips or drops.
- **Multiple Sling Leg Compatibility:** Designed to work with multiple sling legs for balanced lifting.
- **Premium Construction:** Crafted from durable G80 alloy steel quenched and tempered.
- The working load at the tip of the hook is 2t.
- Working load at the bottom of the hook is 6.8t
- CE, SWL & JB Lifting (JBL) Mark on the hook.
- **Note:** Pipe hook to be always used in pairs

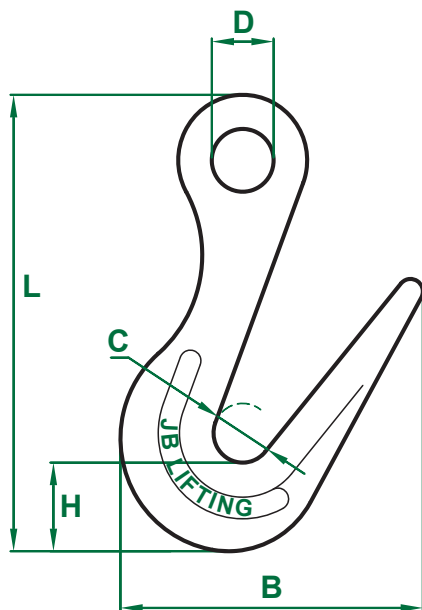

SORTING PIPE HOOK

SRTHK

ItemCode(s)	Pair Working Load Limit at tip of Hook 45-degree STV	Working Load Limit at bottom of Hook	Dimensions					Weight
			D	B	C	L	H	
			mm	mm	mm	mm	mm	
SRTHK1.8T	1.8	6.8	35	170	33	254	49	3.09



WARNING

Never exceed Working Load Limit

The data of products dimension in the catalogue is just for reference!
Copyright©2026 | www.jblifting.com | All rights reserved