


SWIVEL SLING HOOK



Technical Features

- **Standard** EN 1677-2
- **Safety factor** 4:1
- **Proof load** 2:1
- 100% MPI tested.
- Features a rotating hook.
- Prevents twisting during lifting operations.
- For use with Grade 80 alloy steel chain.
- Used for shortening or holding required length of chain.

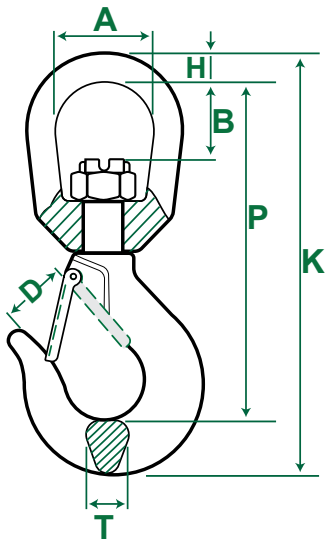

SWIVEL SLING HOOK

SWIVELHK

Item Code(s)	Working Load Limit	Breaking Load	A±1.2	D±1.5	B±1.5	H±1	P±2	K±2.5	T±0.5	Weight
	tonnes	tonnes	mm	mm	mm	mm	mm	mm	mm	kg
SWIVELHK-01T	1.12	4.48	32	22	17	9	109	137	16	0.34
SWIVELHK-02T	2	8	42	21.5	35	15.8	150	192	21	1.02
SWIVELHK-03T	3.15	12.6	42.5	26	35	15.8	162.5	208.5	23	1.24
SWIVELHK-05T	5.3	21.2	48	32.5	39	18	191	246	31	3.6
SWIVELHK-08T	8	32	62	43	53	25	243.5	313	34	4.66
SWIVELHK-12T	12.5	50	68	49.5	51	28.5	276.5	363.5	41.5	7.4
SWIVELHK-15T	15	60	79	54.5	65	32	332	431	55.7	10.6
SWIVELHK-21T	21.2	84.8	105	81	114	40	429.5	545.5	70	21.4
SWIVELHK-31T	31.5	126	105	100	96	40	465.3	596	76.2	32

WARNING

Never exceed Working Load Limit

The data of products dimension in the catalogue is just for reference!
Copyright©2026 | www.jblifting.com | All rights reserved