


DESCRIPTION & FEATURES

- **Material:** Alloy steel.
- **Standard:** EN 1677-4, ASME b30.26
- **Factor of safety:** 4 to 1
- **Construction:** Quenched & tempered.
- **Proof load:** 2 x WLL.
- **Finish:** Powder coated.
- Designed for use with steel wire rope or grade 80 alloy steel chain.
- For overhead lifting application.
- CE, SWL & JB Lifting (JBL) Mark shown on the product.

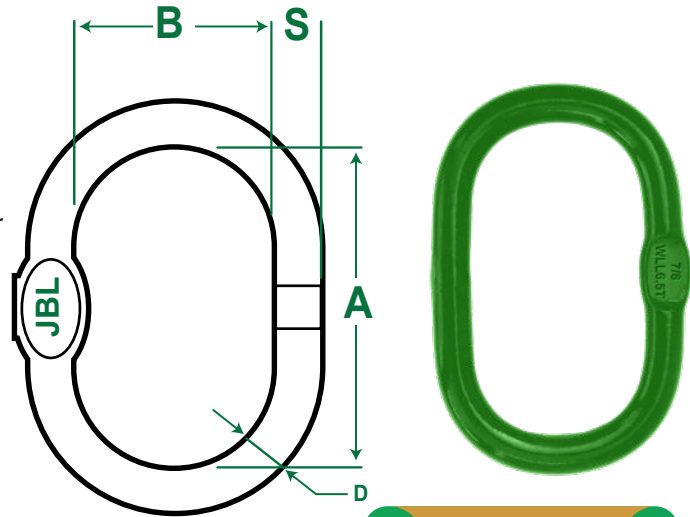

WELDED MASTER LINK

ML

Item Code (s)	Size	Weight/kg	WLL/t	B.L/t	A (mm)	B (mm)	D (mm)		S (mm)
ML01T-93	7/16	0.27	1.6	6.4	100±4	60±4	12±0.5		6±0.5
ML02T-93	1/2	0.38	2.76	11.04	100±4	60±4	14±0.5		7.6±0.5
ML04T-93	11/16	0.85	4	16	160±5	90±4	18±0.5		8.4±0.5
ML06T-93	3/4	1.2	6.5	26	160±5	90±4	20±0.5		10.5±0.5
ML08T-93	7/8	1.63	8.2	32.8	180±5	100±4	22±1		13.5±0.5
ML11T-93	1	2.13	11.5	46	180±5	100±4	25±1		16.5±0.5
ML12T-93	1 1/8	3.81	11.8	47.2	270±6	140±5	28±1		19±0.5
ML16T-93	1 1/4	5.05	16	64	270±6	140±5	32±1		19±0.5
ML21T-93	1-3/8	6.83	21.2	84.8	285±6	155±5	36±1		20±0.5
ML25T-93	1-1/2	8.9	25	100	300±6	160±5	40±1		26±0.5
ML31T-93	1-3/4	12.8	31.5	126	340±7	180±5	45	+1	26±0.5
								-2	
ML45T-93	2	17.3	45	225	390±7	215±6	51	+1	32±0.5
								-2	
ML126-91	"3-1/2"	90.24	126	504	610±10	305±6	89±2		NA



WARNING

Never exceed Working Load Limit

The data of products dimension in the catalogue is just for reference!
Copyright©2026 | www.jblifting.com | All rights reserved