



HMPE Dyneema Chain Sling

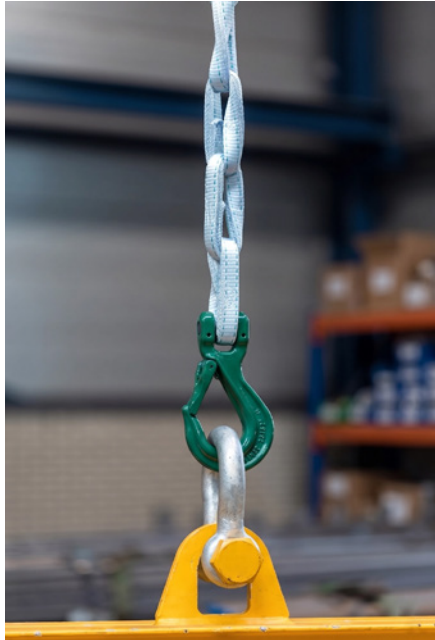

DESCRIPTION & FEATURES

- **Raw Material:** Crafted from advanced High-Performance Polyethylene fabric loops.
- **Safety Factor:** Engineered with a reliable 4:1 safety coefficient.
- **Load Rating:** Safe operation thresholds vary from 5.0 metric tons to 25.0 metric tons.
- **Ultimate Strength:** Material failure threshold is rated between 20 and 100 metric tons.

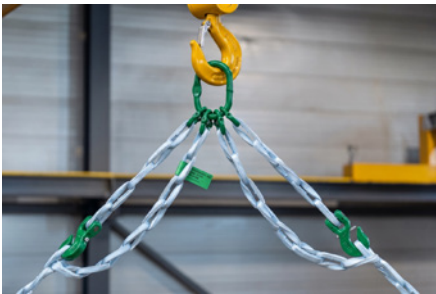

HMPE DYNEEMA CHAIN SLING

No.	Breaking Strength	WLL (SF 4:1)	Chain Link Length	Net Weight
	Tonne	Tonne	mm	kg/m
1	20	5	125	0.55
2	24	6	125	0.7
3	28	7	143	0.8
4	32	8	143	0.9
5	42	10.5	143	1
6	52	13	200	1.4
7	64	16	200	1.7
8	72	18	200	2
9	80	20	250	2.2
10	90	22.5	250	2.4
11	100	25	250	3



WARNING

Never exceed Working Load Limit

The data of products dimension in the catalogue is just for reference!
Copyright©2026 | www.jblifting.com | All rights reserved