


CONCRETE LIFTING SOCKET



DESCRIPTION & FEATURES

- **Safety:** Engineered to meet strict safety and load-bearing standards.
- **Purpose:** Facilitates secure lifting of concrete elements, especially precast components.
- **Embedding:** Embedded or cast into concrete during manufacturing for permanent attachment.
- **Attachment:** Provides a robust connection point for cranes or lifting equipment.
- **Contribution:** Essential for efficient and safe material handling and installation.
- **Reliability:** Ensures secure handling of substantial concrete components.
- **Efficiency:** Facilitates precise and safe lifting and transportation on construction sites.
- **Durability:** Designed to withstand the demands of construction environments.
- **Standard Compliance:** Meets industry standards for quality and performance.
- **Essential Role:** Crucial for ensuring the success and safety of construction projects.
- CE, Serial number, SWL & JB Lifting (JBL) Mark shown on the product.

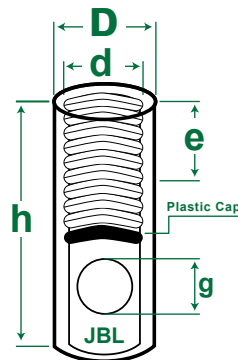

CONCRETE LIFTING SOCKET

SKRD

ItemCode(s)	Thread Finished	WLL	Dimensions			
	d		D	g	h	e
	mm	Tonne	mm	mm	mm	mm
SKRD-12	Rd 12	0.5	15	8	40	22
SKRD-14	Rd 14	0.8	18	10	47	25
SKRD-16	Rd 16	1.2	21	13	54	27
SKRD-18	Rd 18	1.6	24	13	65	34
SKRD-20	Rd 20	2	27.2	15	69	35
SKRD-24	Rd 24	2.5	31	18	78	43
SKRD-30	Rd 30	4	40	22	103	56
SKRD-36	Rd 36	6.3	47	27	125	68
SKRD-42	Rd 42	8	54	32	145	80
SKRD-52	Rd 52	12.5	67.2	40	195	100



WARNING

Never exceed Working Load Limit

The data of products dimension in the catalogue is just for reference!
Copyright©2026 | www.jblifting.com | All rights reserved