


HEAVY DUTY WIRE ROPE CLIP



DESCRIPTION & FEATURES

- **Standard:** U.S. Federal Specification FF-C-450 Type 1, Class 1.
- **Purpose:** Used on wire rope eye connections.
- **Temporary Joints:** Suitable for creating temporary joints as needed.
- **Versatility:** Can be used in various applications and industries.
- **Safety Considerations:** Ensure proper installation for optimal performance and safety.
- **Durability:** Designed to withstand load and wear during temporary use.
- **Compatibility:** Compatible with different types and sizes of wire ropes.
- **Maintenance:** Requires periodic inspection to ensure continued reliability and safety.
- Made from durable G80 alloy steel.
- CE, Serial number, SWL & JB Lifting (JBL) Mark shown on the product.

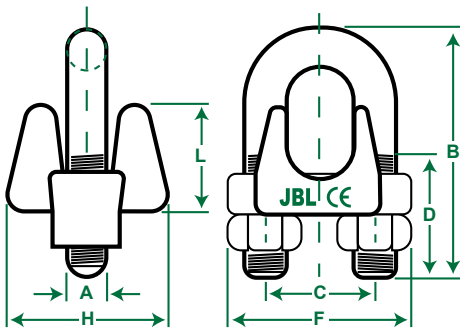

HEAVY DUTY WIRE ROPE CLIP

CLIP-H

ItemCode(s)	Size		No. of Clips	Dimensions							Weight
	mm	inch		A mm	B mm	C mm	D mm	F mm	H mm	L mm	kgs/100
CLIP06-H	12	1/4	2	8	34	19	13	37	30	17	8
CLIP08-H	11	5/16	3	10	45	22	19	43	33	18	14
CLIP10-H	10	3/8	3	11	49	26	19	49	42	25	19
CLIP13-H	12-13	1/2	3	13	61	30	26	58	48	27	34
CLIP16-H	16	5/8	3	16	74	33	32	64	52	33	45
CLIP19-H	18-19	3/4	4	14	86	38	37	72	57	37	68
CLIP22-H	22	7/8	4	19	98	45	40	80	62	40	108
CLIP26-H	26	1	5	19	108	48	46	88	67	44	113
CLIP28-H	28	1-1/8	6	19	117	51	51	91	72	48	140
CLIP32-H	32	1-1/4	7	22	130	59	54	105	79	56	207
CLIP34-H	34-36	1-3/8	7	22	140	60	59	108	79	58	234
CLIP38-H	38	1-1/2	8	22	147	66	60	112	86	64	266
CLIP44-H	38	1-3/4	8	29	175	78	74	134	97	78	441
CLIP50-H	44	2	8	32	195	86	78	152	113	87	603
CLIP58-H	58	2-1/4	8	32	208	98	81	162	116	100	707
CLIP64-H	64	2-1/2	9	32	227	105	87	168	119	113	806
CLIP70-H	70	2-3/4	10	32	243	112	91	174	127	124	1000
CLIP76-H	76	3	10	38	271	121	104	194	135	136	1440



WARNING

Never exceed Working Load Limit

The data of products dimension in the catalogue is just for reference!
Copyright©2026 | www.jblifting.com | All rights reserved